

# ALTO SHAAM® Combitherm®

Combination Oven/Steamer  
Ventless Hood

• ELECTRIC •

## VHML-5

## VHML-10



- ✦ Now you can operate an Alto-Shaam® Combitherm Combination Oven/Steamer without an expensive oven hood or costly hood installation.
- ✦ Self-contained oven venting system fully tested and listed by Underwriters Laboratories for both safety and sanitation.
- ✦ Alto-Shaam's factory installed Ventless Hood is placed directly on the top of a Combitherm oven.
  - **VHML-5 Ventless Hood**  
Combitherm model 6•05ML & 6•10iNML
  - **VHML-10 Ventless Hood**  
Combitherm models 6•10ML, 7•14ML, 10•10ML & 10•18ML
- ✦ A high-power fan draws steam and fumes into the hood intake and out the top surface exhaust vent, trapping grease as the air moves through the filter system.
- ✦ As fumes and vapors are circulated through the hood, condensed steam drains from an opening at the rear.
- ✦ For a built-in margin of safety, a special door interlock switch is timed to prevent the oven door from being fully opened until the steam and vapors are pulled into the vent.
- ✦ Power requirements to the ventless hood operate directly from the power supplied to the Combitherm oven.

ALTO-SHAAM® SYSTEMS



COMBITHERM ELECTRIC • COMBITHERM ELECTRIC • COMBITHERM ELECTRIC • COMBITHERM ELECTRIC

# SIZES & SPECIFICATION





MODEL	VHML-5 5000366	VHML-10 5000367
AIR MOVEMENT	530 CFM	1200 CFM
DRAIN CONNECTION	3/4" NPT	
ELECTRICAL	208-240 V.A.C. — 50/60 Hz, 1 ph	
	100 Watts, .50 Amps	240 Watts, 1.0 Amps
SHIP WEIGHT	100 lb (45 kg)	126 lb (57 kg)
Replacement Filters		
	Grease Charcoal	FI-24113 FI-24114

\*For additional information on the Combitherm Specifications, see individual specification sheets.

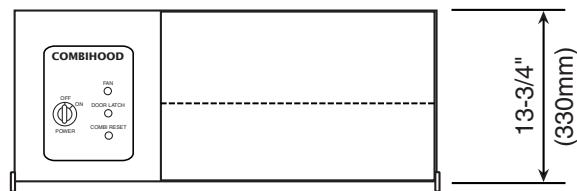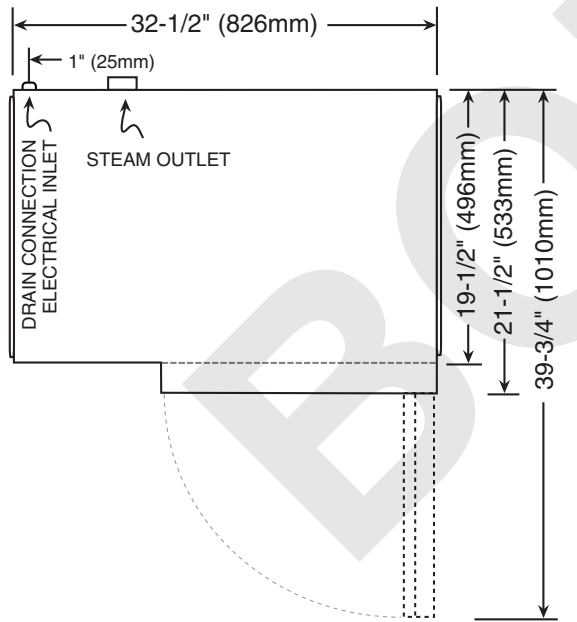

**VHML-5 Ventless Hood**

Combitherm models 6•05ML & 6•10iNML

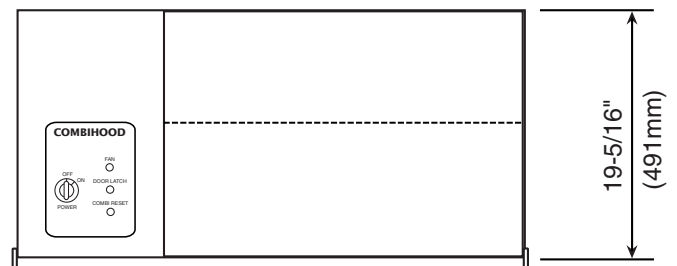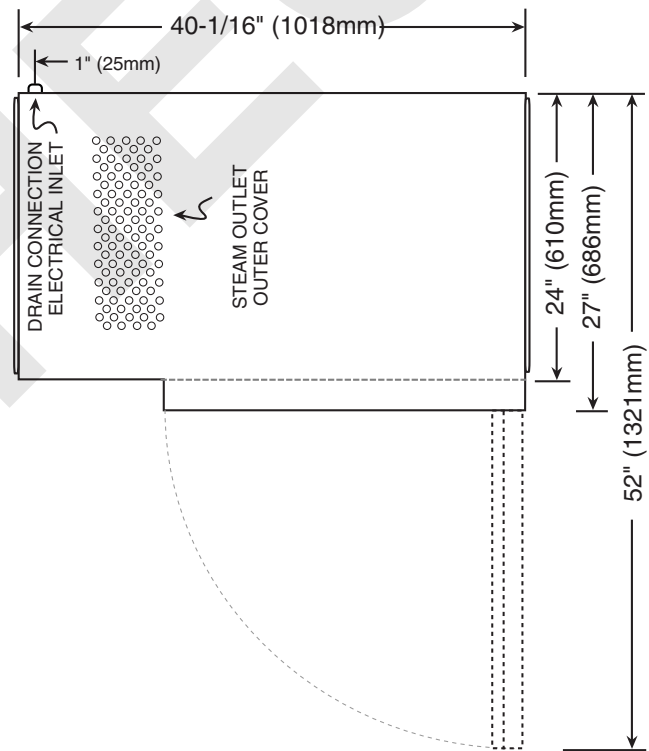

**VHML-10 Ventless Hood**

Combitherm models 6•10ML, 7•14ML, 10•10ML & 10•18ML

\*NOT DRAWN TO SCALE