

PROJECT:	
MODEL #:	
ITEM #:	QTY:
AVAILABLE W/H:	APPROVAL:

## Glass Door Merchandiser



BKGM12-HC / BKGM14-HC



BKGM48SL-HC

### STANDARD FEATURES

#### Cabinet construction

- Black or white painted steel exterior and white painted steel interior.
- High density foamed in place polyurethane insulation – Environmentally safe.
- Sturdy, epoxy coated wire shelves with adjustable shelving height.
- 4 shelves for each compartment
- 2.5" Diameter swivel casters with front brakes.
- Four casters on one- and two-door models and six on three-door models (two casters on each model have front brakes)

#### Refrigeration

- Hydrocarbon refrigerants (R-290) – increases energy efficiency by up to 25% compared to using HFC refrigerants. It is safer for the environment and does not cause ozone depletion.
- Front sliding refrigeration unit allows the unit to be serviced without being moved.

- Self-contained system, bottom mounted compressor provides quick and easy maintenance
- Epoxy coated evaporator reduces potential corrosion
- Refrigerator has a temperature range between 33°F ~ 39°F

#### Doors

- Self closing doors (doors close at 90° or less)
- Automatic hold open door feature at 110°
- Durable door gasket with easy replacement.
- Heavy duty recess door handles
- Door designed to open easily.
- Doors built with pressure relievers to eliminate vacuum pressure and allow easy door opening.
- Standard door locks
- Double pane glass

#### Design & Features

- Digital temperature control & monitor system

Keep food products safe by maintaining constant temperatures.

- Digital display allows for easy monitoring. Programs interpret the condition of refrigeration systems by self-diagnosis.
- Controls include automatic evaporator fan motor delays.

#### Lighting

- LED backlit graphic panel
- Interior Vertical LED lighting

#### Standard

- NSF/ANSI Standard 7 compliant

#### Connection


- 9 ft long flexible three wire cord with molded plug

#### Optional Features & Accessories

- Additional shelves are available

# Glass Door Merchandiser

## PRODUCT PLAN VIEW

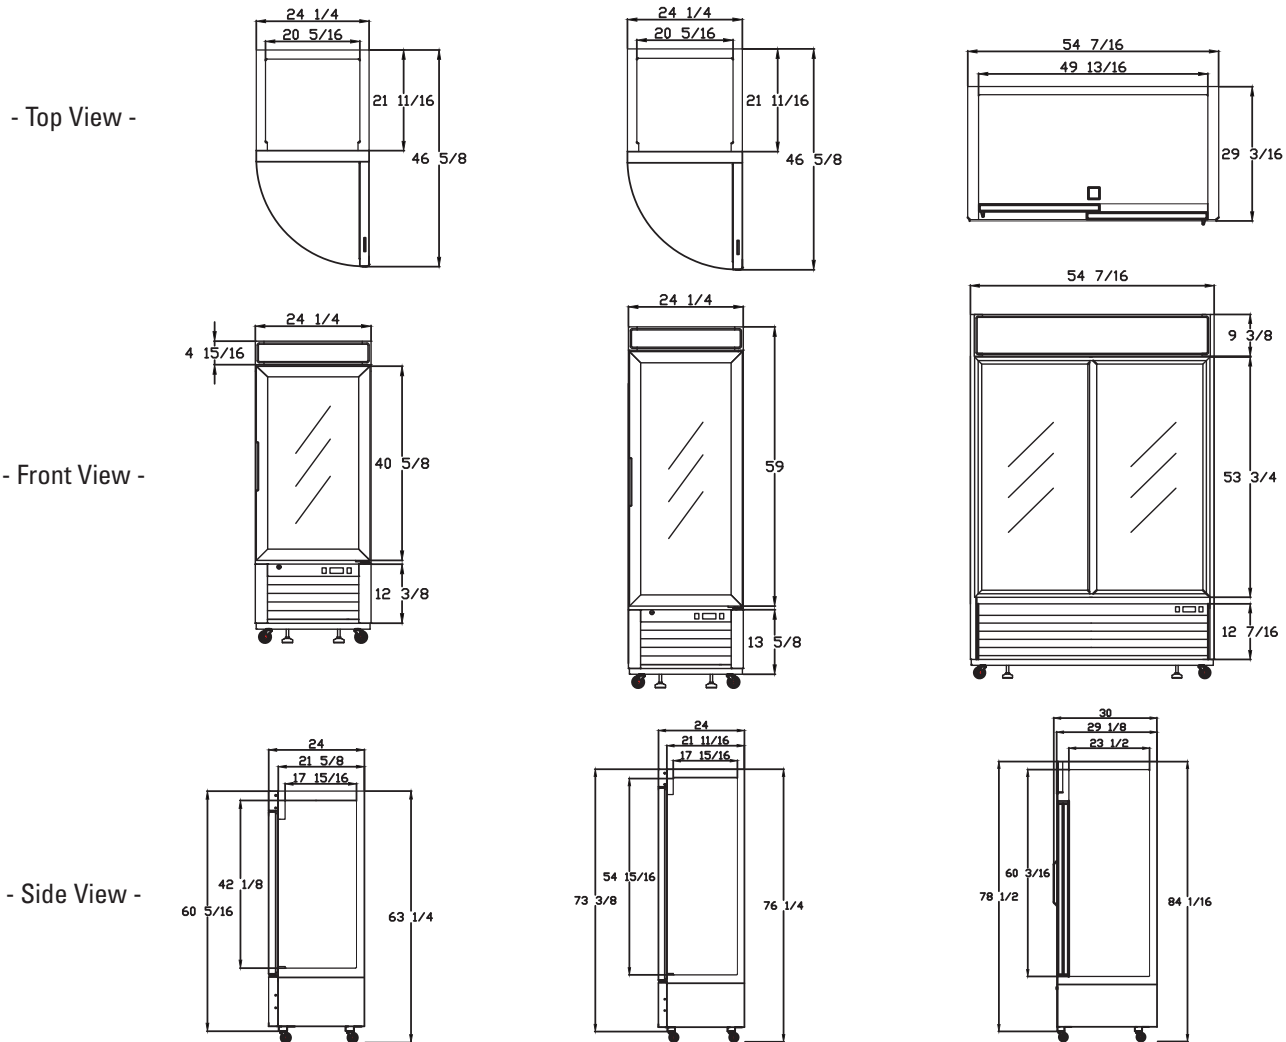

**BKGM12-HC**

**BKGM14-HC**

**BKGM48SL-HC**

## PRODUCT SPECIFICATION

Model	Product Description						Refrigerant			Temperature Range		
	Glass Door Merchandiser Refrigerator						R-290			33 ~ 39 °F		
	Easy Maintenance				Voltage		NEMA Config.			Cord Length (ft/m)		
	Sliding Condensing Unit				115V/60Hz		NEMA5-15			9.8ft (3m)		
	Doors	Capacity (Cu. Ft.)	Shelves	Cabinet Dimensions (inches / mm)			Foot	HP	Amps	Net Weight (lbs/kg)	Ship Weight (lbs/kg)	
			L	D	H							
BKGM12-HC	1 Swing Door	12	4	24 1/4" (615mm)	24" (610mm)	63 1/4" (1606mm)	4 Casters	1/7	2.1	190 (86)	209 (95)	
BKGM14-HC	1 Swing Door	14	4	24 1/4" (615mm)	24" (610mm)	76 1/4" (1936mm)	4 Casters	1/7	2.1	227 (103)	251 (114)	
BKGM48SL-HC	2 Sliding Doors	44.85	8	54 7/16" (2135mm)	30" (770mm)	84 1/16" (2135mm)	4 Casters	1/4	4.2	430 (195)	511 (232)	

\*BLUE AIR has the right to change specifications without further notice.