

PROJECT :	
MODEL # :	
ITEM # :	QTY :
AVAILABLE W/H :	
APPROVAL :	

Bottom Mount Glass Door Reach-In Refrigerator

D-SERIES



BSR23G



BSR49G

STANDARD FEATURES

BOTTOM MOUNT COMPRESSOR

THE BOTTOM MOUNT COMPRESSOR PROVIDES QUICK AND EASY MAINTENANCE

STAINLESS STEEL INTERIOR AND EXTERIOR

QUALITY STAINLESS STEEL HELPS MINIMIZE DENTS, SCRATCHES AND RUST

STANDARD REAR WALL AIR GUARD ENSURES PROPER AIR FLOW AND COOLING

EVAPORATOR FAN STOPS AUTOMATICALLY WHEN DOOR IS OPENED

DOUBLE PANED GLASS DOORS

SELF-CLOSING DOOR WITH STANDARD DOOR LOCKS

DURABLE DOOR GASKET WITH EASY REPLACEMENT

INTERIOR FLUORESCENT LIGHT

DIGITAL TOTAL MONITORING SYSTEM

OFFERS AN AUTOMATIC DOOR ALARM SYSTEM, EASY TEMPERATURE ADJUSTMENT AND A SIMPLE TO CONTROL DEFROST CYCLE

4" DIAMETER SWIVEL CASTERS WITH FRONT BRAKES

CFC FREE HIGH DENSITY CELL POLYURETHANE INSULATION

ALL MODELS ACCOMMODATE FULL SIZE BUN SHEET PANS

4 SHELVES PER EACH DOOR SECTION WITH 1" ADJUSTABLE SHELVING HEIGHT

OPEN DOOR WARNING ALARM

OPTIONAL LEFT HINGED DOOR

BSR23G MODEL FACTORY INSTALLED OPTION

CERTIFIED FOR OPEN FOOD USE



WARRANTY

3 Years Parts and Labor
5 Years on Compressor in USA


APPROVALS:

AVAILABLE AT:

Bottom Mount Glass Door Reach-In Refrigerator

D-SERIES

Product plan View

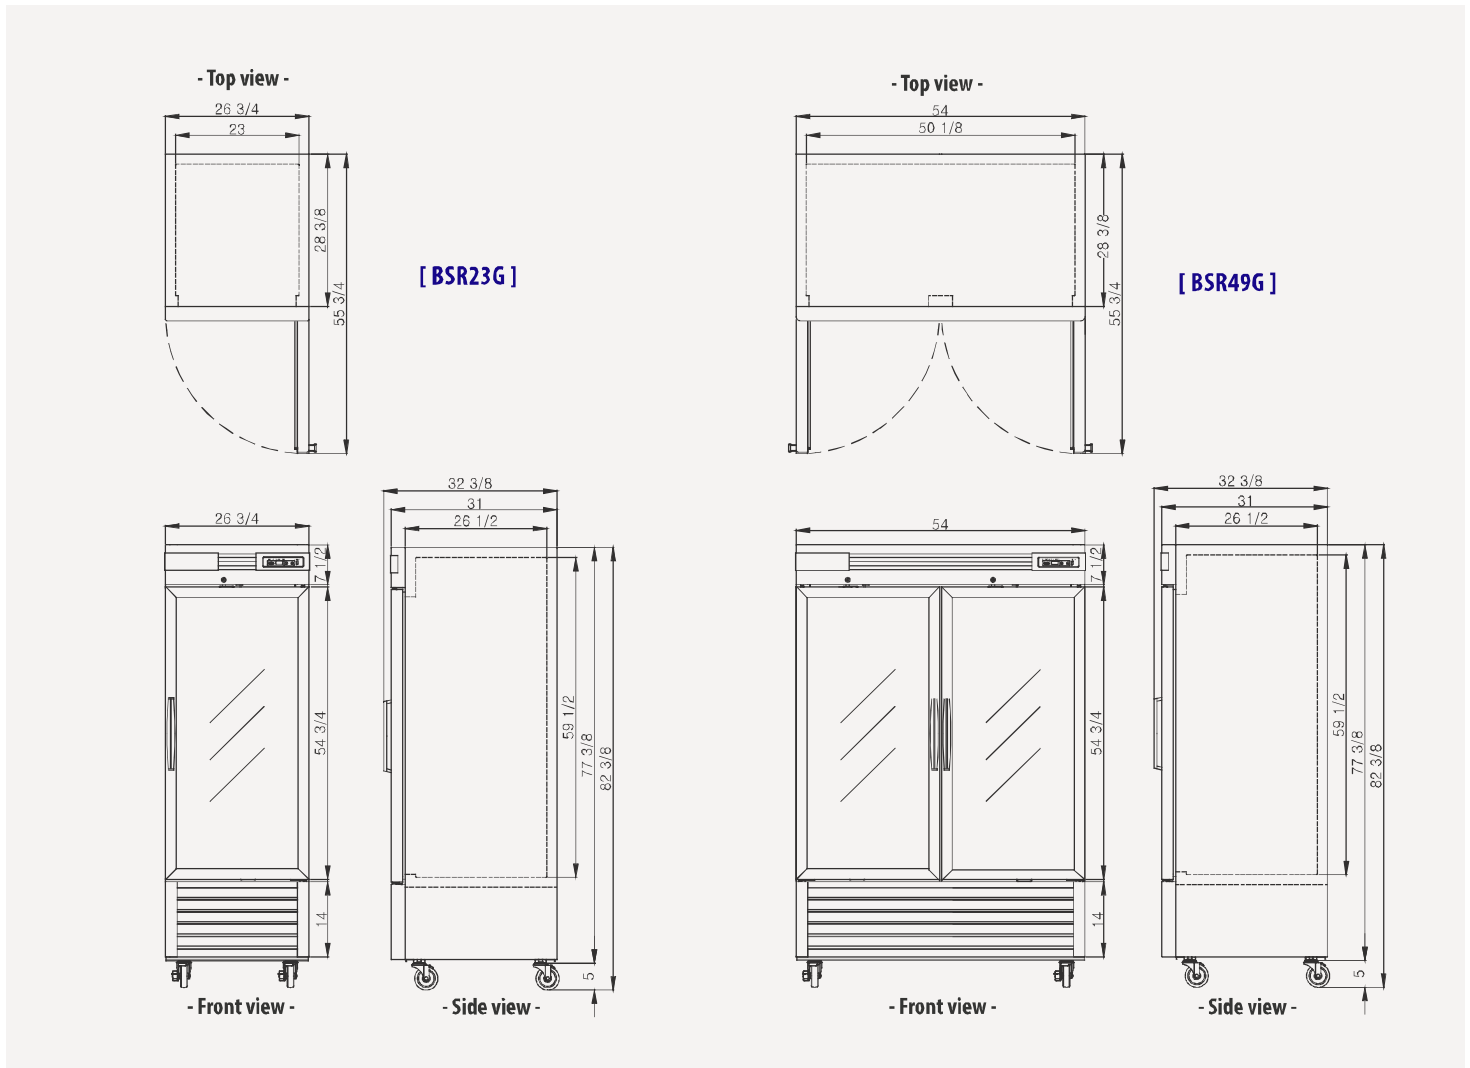

Product Specification

Bottom Mount Glass Door Reach-In Refrigerator / D-Series

Model	Product Description						Refrigerant			Temperature Range	
	Bottom Mount Glass Door Refrigerator						R-134a			33 ~ 38 °F	
	Easy Maintenance				Voltage		NEMA Config.			Cord Length (ft/m)	
	Sliding Condensing Unit				115V/60Hz		NEMA 5-15			9.8ft (3m)	
	Doors	Capacity (Cu. Ft.)	Shelves	Cabinet Dimensions (inches / mm)			Foot	HP	Amps	Net Weight (lbs/kg)	Ship Weight (lbs/kg)
			L	D	H						
BSR23G	1 Swing Door	23	4	26 3/4" (681mm)	31" (787mm)	82 3/8" (2100mm)	4 Casters	1/3	6.5	302 (137)	337 (153)
BSR49G	2 Swing Doors	49	8	54" (1370mm)	31" (787mm)	82 3/8" (2100mm)	4 Casters	3/4	11.5	445 (206)	485 (220)

* BLUE AIR has the right to change specifications without further notice.