

SUPERIOR COOLING

TOP TO TUBE

- Exclusive refrigerated valve assembly
- Ensures constant cooling at the pinch point
- Exceeds NSF Standard No. 20



Model SK3 IMP



Model SK2 IMP



Model SK1 IMP

SILVER KING[®]
WE'VE GOT REFRIGERATION DOWN COLD™

IMPERIAL SERIES MILK DISPENSERS


| | | |
|----------------|----------------------|--|
| MODELS | EXTERIOR | Stainless steel. |
| SK1 IMP | INTERIOR | Stainless steel interior, 18-gauge bottom. 12-gauge steel angle frame welded into cabinet interior. 14-gauge steel welded base assembly. |
| SK2 IMP | INSULATION | Semi-rigid fiberglass and rigid polyfoam. |
| SK3 IMP | DOOR | Stainless steel exterior and interior. Heavy duty lift off hinges with stainless steel cover plates. Door latch accommodates padlock. Thermal-plastic PVC, non-migrating gasket is sealed in place. Temperature indicator in door. |
| | REFRIGERATION | CFC-free, hermetically sealed, self contained system with fan cooled condenser. Cold wall copper tube evaporator for even distribution of cooling. Adjustable temperature control and built-in temperature indicator. |
| | ELECTRICAL | Standard 115 volt, 60 Hz, single phase operation with 7 foot power cord and NEMA 5-15P plug. Also available in 230 volt-50 Hz, single phase. |
| | VALVE | Exclusive refrigerated system. |
| | CONTAINERS | Accommodates 3 or 5-gallon dispenser can or 3, 5 or 6-gallon single service bag and box containers. |
| | ELECTRICAL | Standard as 115 volt, 60Hz, single phase operation. 8 foot, 3-wire power cord with NEMA 5-15 plug. Available in 230 volt, 50 Hz, single phase. |
| | LISTINGS | ETL (U.S. and Canada), NSF International. |
| | WARRANTY | One year parts and labor warranty on cabinet and refrigeration system. Five year warranty on compressor. |
| | OPTIONS | Malt Mixers, Wall Mounting Kit, Drip Basins, Stainless Steel Back, Milk Crates. |

| MODEL | EXTERIOR DIMENSIONS | | | CAPACITY | | | AMPS | WEIGHT |
|---------|---------------------|---------|-----------------|------------|-------------|------------|------|---------|
| | LENGTH | DEPTH | HEIGHT | CONTAINERS | MALT MIXERS | COMPRESSOR | | |
| SK1 IMP | 14 1/8" | 17 1/8" | Adjustable | 1 | 1 | 1/12 hp | 1.4 | 104 lbs |
| SK2 IMP | 25 1/8" | 17 1/8" | Adjustable | 2 | 2 | 1/6 hp | 2.5 | 138 lbs |
| SK3 IMP | 36 1/8" | 17 1/8" | 39 1/4"-40 1/4" | 3 | 2 | 1/5 hp | 2.7 | 176 lbs |



Specifications subject to change without notice.

Dimensions in inches and centimeters

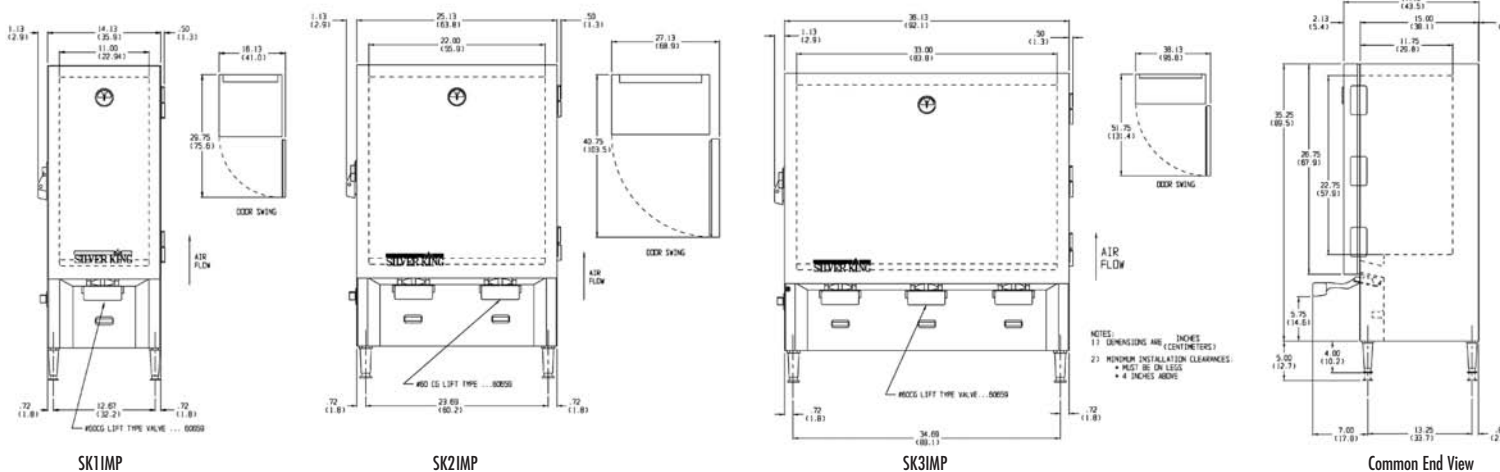

1600 Xenium Lane North
 Minneapolis, MN 55441-3787
 Phone (763) 923-2441
 Fax (763) 553-1209
 www.silverking.com

#FNSKIMP04
 © Silver King 2004
 Printed in U.S.A.